

2019 PRODUCT CATALOG
THUCK SEE LINES | PROTECTIVE CONTINGS | WINDOW FILM
SCORPION PROTECTIVE COATINGS, INC.

#### TABLE OF CONTENTS

### **NEW PRODUCTS FOR 2019**

CMX	
CMX PROTECT (CMX-TOP/CMX-BASE)	1
CMX PREP (CMX-PREP)	2
CMX RENEW (CMX-RENU)	3
CMX REPEL (CMX-R50)	4
CHARTEL LE (CHARTEO)	,
AL'S LINER SHAKE & SHOOT	5
PRE-CUT PAINT PROTECTION FILM	6
WINDSHIELD WIPERS	7
DOOR EDGE GUARDS	8
AMMONIA-FREE GLASS CLEANER	9
ARX ADHESIVE REMOVER	10
PRODUCTS	
SCORPION XO2 PRODUCTS	
SCORPION XO2	11
2 GALLON KITS (NX-TK1)	12
XO2 STARTER KIT (TIK199)	13
XO2 STARTER KIT (TIK495)	14
XO2 9 GALLON KIT (CHXOK1)	15
XO2 45 GALLON KIT (CHXO45)	16
PRIME BOND CLEANER (CHPBC1)	17
ADHESION PROMOTER (CH8001)	18
ACCELERATOR (CHACC1)	19
DTM ETCHING PRIMER (CHDTM)	20
GRIPPER GRANULES (GRPGRA)	21
BLACK RUBBER CRUMB (RCBLK)	22
VINYL FLATTENER (CHFLT/FLTNR)	23
RUBBERIZED UNDERCOATING (UCR)	24

AL'S LINER PRODUCTS	
AL'S LINER SPRAY GUN (ALS-SG2)	25
RED CUP BRUSH (TOOR4/TOOR6)	
26	
HEAT AND NOISE REDUCER (ALS-HNR)	27
SCORPION HIGH PRESSURE PRODUCTS	
SCORPION HP (ARM/HP-GL)	28
GRECO A-XP1 (G-AXP1)	29
GRECO E-XP1 (G-EXP1)	30
CARTRIDGE SYSTEM (CART7AR)	31
SCORPION WATERBORNE URETHANE (WB250)	32
SCORPION WINDOW FILM PRODUCTS	
AUTOMOTIVE WINDOW FILMS	33
AUTOMOTIVE WINDOW FILM PERFORMANCE DATA	34
FLAT GLASS PERFORMANCE DATA	35
FILM TO GLASS COMPATIBILITY CHART	36
PAINT PROTECTION FILM	37



**Scorpion Ceramix** 

Advanced Nano-Ceramic Technology

#### FEATURES:

- Ultra Clear / Super Hydrophobic
- UV Resistant Protection
- Extremely Profitable
- Chemical and Abrasion Resistant
- Self Cleaning
- Repels Dirt and Water
- Super Durable 9H Hardness
- Easy to Use, Lays Flat, Cures Fast
- Advanced Nano Technology
- Long Lasting / Extreme GlossinessForms a 3-D Matrix of Protection





**EXTREME PROFITS** TO YOUR SHOP



**QUICK & EASY APPLICATION** 



NO TOOLS NEEDED **OUT OF THE BOX** 

# 800-483-9087

SCORPIONCOATINGS.COM
















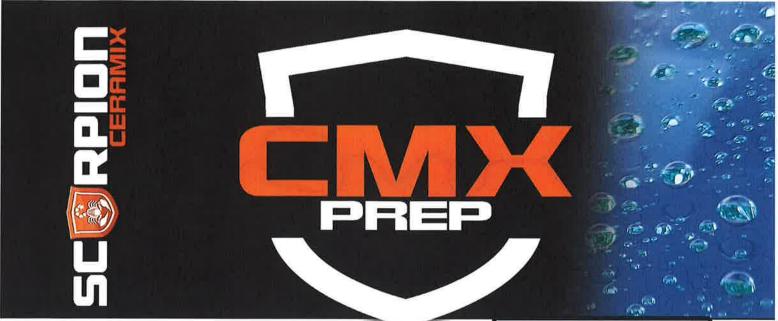

Scorpion Ceramix

## CERAMIC PREP SPRAY

Strips Wax, Grease & Polishing Oils

#### **FEATURES:**

- Works Fast
- Body-Shop Safe
- Vital Step Prior to Ceramic Coating
- Easy on / Easy Off
- Use in between Correction Steps & Afterwards





**EXTREME PROFITS** TO YOUR SHOP



**QUICK & EASY APPLICATION** 



NO TOOLS NEEDED **OUT OF THE BOX** 

## CALL NOW 800-483-9087

SCORPIONCOATINGS.COM













Scorpion Ceramix
CERAMIC COATING
MAINTENANCE SPRAY,
WATERLESS CAR WASH,

WATERLESS CAR WASH, QUICK DETAILER

#### **FEATURES:**

- · Cleans, Seals, Protects all in one
- Body-Shop Safe
- Use on Ceramic Coated & Non Coated Cars
- Spray on / Gently Rub in / Wipe Off
- Cuts Dirt, Dust & Grime on Contact
- Use on a Wet or Dry Surface
- Streak-Free Safe on All Solid Surfaces





EXTREME PROFITS TO YOUR SHOP



QUICK & EASY APPLICATION



NO TOOLS NEEDED OUT OF THE BOX

## **CALL NOW**

800-483-9087 SCORPIONCOATINGS.COM

















**Scorpion Ceramix** 

# Glass Water Repellent Advanced Nano Technology

#### **FEATURES:**

- Ultra Clear
- UV Resistant Protection
- Extremely Profitable
- Chemical and Abrasion Resistant
- Self Cleaning / Repels Dirt and Water
- 7 Mohs Hardness (Equivalent to Quartz)
- One Application Lasts 1-3+ years
- Advanced Nano Technology
- Increases Visibility

#### **EASY TO USE**

Simply Wipe On **Dries Instantly** Cures in Seconds





The harder it rains, the better you can see.



**EXTREME PROFITS** TO YOUR SHOP



**QUICK & EASY APPLICATION** 



**NO TOOLS NEEDED** OUT OF THE BOX

# **CALL NOW**

800-483-9087 SCORPIONCOATINGS.COM




















PRE-CUT PAINT
PROTECTION KITS

WWW.SHOP.SCORPIONWINDOWFILM.COM

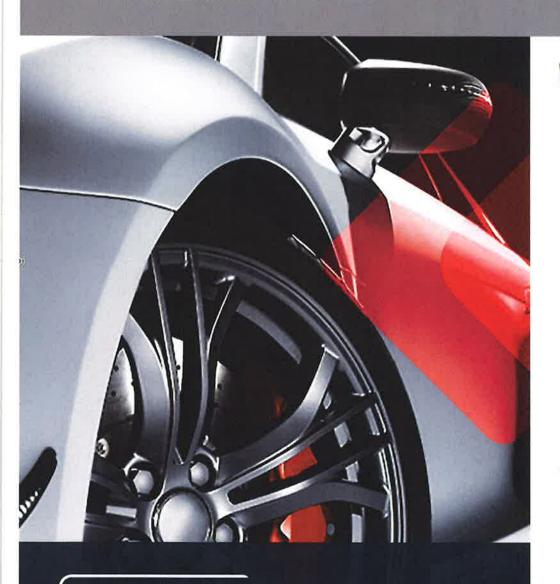

## BODYFENCE

PAINT PROTECTION FILM

E:SALES@SCORPIONWINDOWFILM.COM



#### **CHIP RESISTANT**

°STOP RUST BEFORE IT BEGINS

#### SEAL HEALING

•SCRATCHES WILL REGENERATE WITH HEAT FROM SUN

#### **ULTRA-TRANSPARENT**

\*DOES NOT ALTER THE APPEARANCE OF THE PAINT

#### SELF-CLEANING

•ANTI-ADHESION ADDITIVE REPELS ROAD DEBRIS

P:(800) 483-9087

WWW.SHOP.SCORPIONWINDOWFILM.COM







Quick Selling - High Profit Blade Program Now Available

Introducing Scorpion's High Performance All Season Windshield Wiper Blades. These revolutionary wiper blades provide an innovative multipurpose solution that fits on most vehicles. These universal windshield wiper blades come with multiple adapters that will allow you to get the right fit for your vehicle. Scorpion's Wiper Blades provide excellent wipe quality that is comparable to all the leading brands.

Scorpion Professional Series Wiper Blades are designed for even, quiet, and long-lasting operation. Our specially crafted blades are made from the finest materials that resists weather and ultraviolet damage. The curved design applies even pressure across the entire blade creating a streak free wipe. Traditional wiper blades are prone to lifting while driving and getting blocked with ice, leaves, and snow. Our curved design protects the blade from ice, leaves, snow, and other debris while allowing it to evenly grip the windshield.

#### How the Program Works:

Start-up Package runs \$399.95 and includes free shipping.

This package contains 6 each of the following blade sizes (66 blades): 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 26. Also included in the package is the wiper blade display.

#### How to Re-Order Wiper Blades:

When you need to order more blades, you are required to order a minimum of 10 blades in one size. This will run \$59.95.

CALLTODAY
CONTACT YOUR REP FOR DETAILS
800-483-9087







#### DOOR EDGE GUARDS BY SCORPION

Scorpion Door Edge Guards are a Paint Protection Film designed to prevent damage to the door edges such as chips, dings, and scratches from normal wear and tear.

Once these chips appear, rust will soon follow.

Simple and easy installation leads to protection for your vechicle.

## 25 DOOR KIT

#### Description:

- \*Bends Around Curves and Contours
- \*Easy Application and Removal
- \*Weather Seal Adhesive
- \*Protects paintwork along the door edge.
- \*Helps prevent chips, knocks, scratches, etc.



### **FEATURES**

- Adds style and protection
- Stops Rust before it happens
- Easy to apply
- Trim or cut to desired length
- Flexible around body lines
- UV protected for long life







#### **Key Benefits:**

- > Reduce Initial Tack Time
- Speeds Up Installs
   Completely Adjustable

### Scorpion Glass Cleaner is Window Tint Safe.

Scorpion Glass Cleaner is a heavy-duty clinging foaming glass cleaner that lifts away the toughest soils. Scorpion Glass Cleaner has no dripping, running, or streaking.

Using our Ammonia-Free formulation, our glass cleaner cleans thoroughly, dries fast, does not require rinsing, and leaves a very fresh scent upon wipe off. Scorpion Glass Cleaner can be used to remove fingerprints, dust, dirt, smoke film, lipstick, and many other substances.



#### SOLD BY CAN OR CASE

#### Description:

- \*Glass Cleaner
- \*Spray On, Wipe Off, Streak Free
- \*Cleans, Restores, and Shines
- \*Use On Windows, Mirrors, Windshields, Plastics Computer
- \*Screens, Chrome, and Other Hard Surfaces
- \*Leaves No Film, Low VOC

#### **Product Information:**

FRESH AIR SCENT

LOW VOC'S

LIGHT, FOAMY MIST

RECYCLABLE PACKAGING

SAFE ON ALL SURFACES

AMMONIA FREE

















## Quickly and easily remove window tint and other adhesives from glass with Scorpion ARX.

Scorpion's new formulation of adhesive remover works wonders to aid in the removal of window tint and other adhesives from glass. Scorpion ARX penetrates film and adhesives allowing them to soften up. This allows for quick removal with razor blades.

Scorpion ARX is sold in gallon quantities with 4 to a case.

#### Features & Benefits:

- Aids in tint/adhesive removal
- Saves time and money
- Cuts through adhesives quickly
- Extreme performance
- · Economically priced







Scorpion XO2 is a three component, batch-mixed polyurethane coating system designed to be easy to apply, tough and UV resistant.

Scorpion X-O2 is a chemically engineered product that uses the best characteristics of polyurethane (aliphatic aromatic blend polyurethane has incredible strength), and when combined with our patented acrylics blend, adds ease of application and UV stability.

Scorpion X-O2 can be batch mixed in any quantity and yields excellent abrasion resistance, high tensile strength, and superior elongation and tear properties. Scorpion X-O2 performs exceptionally well in virtually all production, weather and chemical environments.

Low equipment and coating cost, along with unequaled performance, makes Scorpion X-O2 one of the most desirable coating products in the world.



Scorpion XO2 can be applied to virtually any surface including:

- Wood
- Metals
- Fiberglass
- Concrete









What Comes In the Kit?

2x A Components

• 2x B Components 2x C Components

• 1x Mixing Paddle

 2x Color Components 1x Adhesion Promoter

## 2 Gallon Bed Liner Kits Part #: NX-TK1

# of Truck Beds: 1 - 6' Truck Bed

Color: Black Included

Custom Color: Can Custom Colored

Mixing Paddle: Included

XO2 Pot Life: 20 Min @ 70°F


Truck Bed Prep Time: 2-3 Hours

A = Base Poly B = Activator C=Acrylic







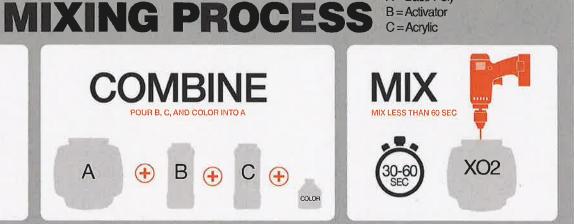

### What Can You Spray With XO2?

- Painted Surfaces
- Bare Metals (etching primer required)
- Fiberglass
- Concrete

### Call Tech Support Before Spraying...

- Specific Foams
- Specific Rubbers
- Specific Plastics

#### Additional Items

Description Part#

TOOR6 6" Red Cup Brush

TOOR4 4" Red Cup Brush

TOOVG Electric Variable Speed Polisher

CHPBC1Q Prime Bond Cleaner

> 3/4" Masking Tape NA

NA 2" Masking Tape

NA Masking Plastic

NA Masking Paper



## \$249 Truck Bed Liner System

2 Gallon XO2 Kit + Professional Series Spray Gun

### Get Started With Scorpion for only \$249

Scorpion has developed an easy and inexpensive way to start using Scorpion. You can use it to verify that it meets your company's needs with no capital investment.

This package contains 2 gallons of Scorpion XO2 material and our low volume spray gun, LMR for easy gun cleaning, and a 4" Red Cup Brush for only \$249

\$249

**TIK199** 

2 Gallons XO2

Spray 1 Truck Bed Liner

Professional Series Spray
Gun

4" Cup Brush & LMR



#### Reorder Process:

When you finish using your kit, give your sales rep a call. We will walk you through the next steps as part of the Scorpion family.

You can keep purchasing 2 gallon kits as you need them or larger volume kits.



Enough material to spray 1 truck bed liner.

**GET MORE. MAKE MORE. SPEND LESS** 

E: SALES@SCORPIONCOATINGS.COM P: (800) 483-9087 F: (765) 653-7175



# \$495 Truck Bed Liner System

3x - 2 Gallon XO2 Kits - Professional Series Spray Gun

### Get Started With Scorpion for only \$495

Scorpion has developed an easy and inexpensive way to start using Scorpion. You can use it to verify that it meets your company's needs with no capital investment.

This package contains 6 gallons of Scorpion XO2 material and our low volume spray gun, LMR for easy gun cleaning, and a 4" Red Cup Brush for only \$495.

\$495

TIK495

6 Gallons XO2

Spray 3 Truck Bed Liners

Professional Series Spray Gun

4" Cup Brush

LMR



#### Reorder Process:

When you finish using your kit, give your sales rep a call. We will walk you through the next steps as part of the Scorpion family.

You can keep purchasing 2 gallon kits as you need them or larger volume kits.



Enough material to spray 3 truck bed liners.

GET MORE. MAKE MORE. SPEND LESS



The 9 Gallon Kit has been the standard XO2 kit for many years. It's packed with enough material to cover 180ft<sup>2</sup> or 4 truck bed applications.

### 9 Gallons or 2 Gallons?

#### Which kit is right for me?

The 9 gallon kit is right between the new 2 gallon kit and the 45 gallon kit. It is the right size for applicators wanting more material at one time then the 2 gallon kit. The added benefit of buying more material is a lower cost per gallon.

If you are spraying more than 1 or two trucks at a time or smaller commerical applications, the 9 gallon kit may be the right size kit for you.

#### **GREAT FOR:**

- Multiple applications in a row
- Larger volume customers
- Applicators needing more material

#### WHAT'S IN THE 9G KIT?

#### The 9 Gallon Kit Contains:

- 5 Gallons XO2 A
- 2 Gallons XO2 B
- 2 Gallons XO2 C

#### MATERIAL ONLY

The 9 gallon kit does not come with 8001 Adhesion Promoter or Tint.

#### How much tint to order:

As a general rule order 1 quart of tint per 9 gallon kit. You can also use custom automotive pigment from your local paint supplier. For custom colors, contact Scorpion Technical Support.















Scorpion Protective Coatings, Inc. 6184 S US HWY 2 Cloverdale, IN 46120 800 483 9087



The 45 Gallon Kit is designed for larger volume applicators. This kit contains enough XO2 material to cover 900ft<sup>2</sup> or 16 truck bed applications.

#### 45 Gallons or 9 Gallons?

#### Which kit is right for me?

If you are considering this kit, you probably are looking at a higher volume of applications. This kit will reduce costs for both material and shipping costs. Possible users are higher volume accessory or body shops, dealerships, or commercial applicators.

By ordering 45 gallon kits, XO2 square footage costs go down to \$2.81. That is a 6% decrease compared to the 9 gallon kit.

#### **GREAT FOR:**

- Large volume customers
- Applicators looking to cut costs further
- Applicators wanting to reduce order frequency

#### WHAT'S IN THE 45G KIT?

The 45 Gallon Kit Contains:

- 25 Gallons XO2 A
- 10 Gallons XO2 B
- 10 Gallons XO2 C

#### MATERIAL ONLY

The 45 gallon kit does not come with 8001 Adhesion Promoter or Tint.

#### How much tint to order:

As a general rule order 5 quarts of tint per 45 gallon kit. You can also use custom automotive pigment from your local paint supplier. For custom colors, contact Scorpion Technical Support.















Scorpion Protective Coatings, Inc. 6184 S US HWY 231 Cloverdale, IN 46120 800 483 9087



## Scorpion 8001 Adhesion Promoter

#### **Key Benefits:**

- > Creates Chemical Bond
- > Easy To Apply
- > Quick Drying
- > Includes Spray Nozzle

### Scorpion 8001 Adhesion Promoter grips a prepped surface and improves XO2's adhesion to the surface.

Scorpion 8001 is one the keys to a great application. XO2 can be applied to virtually any surface as long as it has something to hold on to. For painted surfaces, scratches are created in the clear coat and then cleaned. These scratches provide an area for 8001 to "bite" into and create one half of the bond. XO2 has been engineered to adhere to 8001.

You get the best of both types of bonds - mechanical and chemical. This process is the only true way to get a seamless, watertight coating that prevents rust and corrosion.



Available in quart and gallon pricing



#### Application Method:

Painted Surfaces and Fiberglass

After a painted surface has been properly prepped and cleaned, apply a light mist coat from the spray nozzle. Do not allow the 8001 to pool or run. If this is happening, you are appying too much 8001. If 8001 does pool. simply soak up the excess with a clean cloth.

Let the 8001 Adhesion Promoter sit until tacky This is usually about 15-30 minutes under normal conditions. After this period, you can then mix and apply XO2.

#### **Application Method:**

Bare Metal Surfaces

Bare metal surfaces need an appropriate primer before using 8001 Adhesion Promoter. Once a primer has been applied properly, a light mist coat of 8001 can be used to bond to the primer.















## Scorpion XO2 Accelerator


#### **Key Benefits:**

- > Reduce Initial Tack Time
- > Completely Adjustable

Scorpion is the first and only spray-on truck bed lining company to offer a completely adjustable tack time system.

Scorpion applicators have long enjoyed to 30 minute set time because it allowed them to use regular masking tape as opposed to very expensive, har to use wire tape for prep. In addition, a 30 minute set time allows the applicator to obtain special textures and finishes.

Most Scorpion applicators have noted a 40% increase in volume, thus they want to turn out more trucks per day. Also OEM and outdoor applications have risen dramatically.



- Reduces Tack Time up to 40%
- Turn Out More Volume Faster
- Completely Adjustable



Available in quarts and gallons.

#### Typical Mixture:

#### 4 oz Max Per Large Batch/Gallon

Add up to 4oz per large batch or gallon kit during the mixing process. This will provide up to 40% reduction in initial tack time. You may use less, but never more than the maximum amount.

NOTE: Adding accelerator to your batch or kit will decrease pot life. Be sure you are ready to apply XO2 when using accelerator. Not recommended for use with the EG570 electric sprayer.















## Scorpion DTM Etching Primer

#### **Key Benefits:**

- > Creates Chemical Bond
- > Works on Bare Steel
- > 2 Part Mixture
- > Strong Etching Primer

### Scorpion DTM Etching Primer creates a bonding surface on bare, hardnened steel applications.


When working with bare hardnened steel, 8001 alone cannot create a great bond. For the best bond we need something that will "bite" into the metal and provide a surface that 8001 can adhere to.

DTM solves this problem. It is a strong etching primer rated for hardenend steel. DTM is a two part ethching primer consisting of part A, and part B.

For aluminum and other metals, use an appropriate etching primer rated for that specific metal.



#### How it works

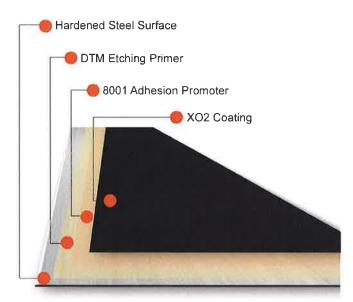

#### Application Method:

Bare, Hardended Steel

As with all Adhesion Promoters, DTM is best applied in one, very thin, pass, normally 1 ounce per 10 square feet. DTM is sold in 2 quart sets containing 1 quart of DTM 'A' and 1 quart of DTM B Mix at a rate of 1.1 Once mixed DTM has usable not life of one hour

DTM is normally dry to the touch in one hour. It must be dry to apply the 8001. DTM is best applied using a hylp gun. Clean up with mineral spirits or lacquer thinner. Discard unused. mixed DTM Adhesion Promoter.

The DTM primed surface must be topped with 8001 and the Scorpion coating applied within 24 hours of the initial DTM application for best results

Do not apply Scorpion X-O2 directly to the DTM Primer. It is intended to act as a bonding agent between 8001 and the bare metal.

















Scorpion Protective Coatings, Inc. Ciovarnale, IN 46120 800 483 9087

## Scorpion Gripper Granules

#### **Key Benefits:**

- > Aggressive Non-Skid Surface
- > Adds Texture
- > Rough to the Touch
- > For Extreme Grip Applications

Scorpion Gripper Granules added to XO2 will give you an extremely aggresive texture in areas where

an aggressive, high traction finish

is required.

This is another texture additive that increases surface texture. Gripper Granules are hard coal slag granules added to XO2 mix to create extreme grip. It is an ideal additive for loading ramps, step bumpers, etc.

A key note about Gripper is the application process. Gripper is a heavy media that will sink if mixed into and sprayed in a normal batch. Gripper is mixed and sprayed as a top-coat that will nestle into the product as it cures.

Trailer Ramps/Floors, marine applications

Applications include:

steps, high traffice areas

SCURPION

#### 50% Rubber/Gripper Load

D.	CATALYZER	COLOR	Α	Rubber/Gripper	TOTAL MIX
	DATALIZER	COLON	-	reason (Gripper	TOTAL MIA
1 CUP	1 CUP	1/8 CUP	2.5 CUPS	1 1/4 CUP	5 75 CUPS

		MEDIUM	BATCH		
8,	CATALYZER	COLOR	A	Rubber/Gripper	TOTAL MIX
1 PT	1 PT	1/4 CUP	25PTS	1.25 PT\$	5 75 PTS

		LARGE	BATCH		
B,	CATALYZER	COLOR	A	Rubber/Gripper	TOTAL MIX
1 QT	1 QT	1/2 CUP	2.5 QTS	1.25 QTS (40 OZ)	5.75 QTS

#### 100% Rubber/Gripper Load

			LARGE	BATCH		
	B*	CATALYZER	COLOR	Α	Rubber/Gripper	TOTAL MIX
E	1 QT	1 QT	⅓ CUP	2 5 QTS	2.5 QTS	7 QTS

#### 25% Rubber/Gripper Load

			LARGE	BATCH		
Г	B*	CATALYZER	COLOR	A	Rubber/Gripper	TOTAL MIX
Г	1 QT	1 QT	1/2 CUP	2.5 QTS	625 QT (20 OZ)	5 25 QTS

## Mixing and Spraying a Gripper Granule Application:

Gripper Granules is a two-step application. Apply a base of XO2 at 50-55 mils. Allow this base to tack over for at least 45 minutes @ 70°F. Once the base has tacked over, mix an appropriate size batch of the XO2 with the Gripper Granules from the chart on the left.

Apply this batch as a texture coat for a uniform Gripper Granule finish.

Do not over mix. You have a 20 minute pot life once the "A" component touches the "B". If you mix for longer than one minute you can reduce this pot life considerably.

All pot life times are based on 70°F. Higher air or material temperatures will reduce pot life time.











# Scorpion Prime Bond Cleaner

#### **Key Benefits:**

- > High Quality Cleaner
- Fast Drying
- > No Residue
- > Includes Pump Sprayer

Scorpion Prime Bond Cleaner is an excellent prepaint cleaner that is fast evaporating and does not leave behind any residue.

One of the most important keys to a quality XO2 application is a clean surface. After scuffing a surface with a cup brush, you are left with debris and dust. Leaving this behind will block the adhesion powers of 8001 creating weaknesses in the coating bond.

We suggest using Prime Bond Cleaner. Prime Bond Cleaner is a fast evaporating, high quality pre-paint cleaner. It drys quickly and will not leave behind any residue.



#### Cleaning Process:

Using the supplied pump sprayers, mist a liberal amount of Prime Bond Cleaner on to the surface. Work in small sections as this is a quick evaporating cleaner.

Wipe down wet areas constantly rotating the cloth's surface. Prime Bond Cleaner will dry very quickly and you will be ready to use 8001 Adhesion Promoter.





## Scorpion Black Rubber Crumb

#### **Key Benefits:**

- > Aggressive Non-Skid Surface
- > Adds Texture
- > Increase Square Footage Yield
- > Not Abrasive to Skin

Scorpion Rubber Crumb is a great way to add more texture to XO2 while increasing the square footage coverage of an application.

Scorpion Rubber Crumb is the perfect additive for floor coatings where water or slick areas are present and you need extreme non-skid properties.

It is made from recycled rubber that is ground into small "crumbs". Ground rubber is lighter than the sand or quartz mix so it stays suspended in the coating through the application process so that you don't have to constantly remix your coating to keep it consistent. It is also a "soft" texture additive that provides traction but is not abrasive.



Applications include: Trailer Ramps/Floors decks, loading docks, work/service truck bodies

#### 50% Rubber/Gripper Load

		SMALL	BATCH		
В,	CATALYZER	COLOR	A	Rubber/Gripper	TOTAL MIX
1 CUP	1 CUP	1/8 CUP	2.5 CUPS	1 1/4 CUP	5.75 CUPS
	1	110 001	2,5 001 0	1,4001	0.10 001 0
		MEDIUM	/ BATCH		
В*	CATALYZER	COLOR	Δ.	Rubber/Gripper	TOTAL MIX

COLOR A Rubber/Gripper TO	Α	COLOR	CATALYZER	В*
1/4 CUP 2 5 PTS 1.25 PTS 5	25 PTS	1/4 CUP	1 PT	1 PT

B*	CATALYZER	COLOR	A	Rubber/Gripper	TOTAL MIX
1 QT	1 QT	1/2 CUP	2.5 QTS	1.25 QTS (40 OZ)	5.75 QTS

#### 100% Rubber/Gripper Load

		LARGE	BATCH			
В*	CATALYZER	COLOR	A	Rubber/Gripper	TOTAL MIX	1
1 QT	1 QT	½ CUP	2.5 QTS	2.5 QTS	7 QTS	1

#### 25% Rubber/Gripper Load

			LARGE	BATCH		
E	B,	CATALYZER	COLOR	A	Rubber/Gripper	TOTAL MIX
E	1 QT	1 QT	1/2 CUP	2.5 QTS	.625 QT (20 OZ)	5.25 QTS

#### Mixing and Spraying a Rubber **Crumb Application:**

To help with cleaning and reusing mix containers, put the "A" component in last for the standard mix. Pour in the "B", Catalyzer, Color and the "A" component. Mix until the Catalyzer (white material) blends in (about 30 seconds). Then add the Rubber Crumb and mix until granules are evenly dispersed with a highspeed drill and mix paddle before putting into the spray hopper. Do not exceed a total of one-minute mix time or you will dramatically reduce pot life.

When spraying the 50% Rubber Crumb mix, set your air pressure at 40-45 PSI with the air trigger at rear of gun. Use 1/4 to 1/3 trigger to get a uniform finish. Do not over-trigger the gun.













## Scorpion Vinyl Flattener

#### **Key Benefits:**

- > Semi-Gloss Finish
- > Reduces Shine for Non-Reflective Surfaces
- > Increases Material Hardness
- > For Interior and Exterior Finishes

Scorpion Vinyl Flattener is a revolutionary product that when added to XO2 hardens the material while reducing the sheen.

Scorpion Vinyl Flattener boosts the durability of your application while delivering a custom semi-gloss or matte finish that can be difficult to achieve with traditional protective coatings.

It's perfect for applications that require a full strength, non-reflective coating, The biggest advantage of our Vinyl Flattener additive is its ability to increase the hardness of Scorpion XO2



Available in quart, gallon and 5 gallon quantities.



**Increases Shore Hardness** up to 10 Points



Reduces Sheen Giving XO2 a Semi-Gloss Appearance



Duplicates the Look and Feel of Polyurea Applications



Can be Used for Interior or **Exterior Applications** 

#### Typical Mixture:

#### 1 Quart Vinyl Flattener per Large XO2 Batch

The urethane/acrylic combination of XO2 offers a more rubberized coating which provides extreme non-skid properties but is pliable if applied with enough thickness. XO2 offers a Shore Hardness of 82 Points Type A, giving it a hardness that exceeds an automotive tire tread by about 20 points. With a full batch of Vinyl Flattener you will see an increase to a 92 Point Type A Shore Hardness, which delivers maximum protection against nicks, dents, scratches or any other accident that might damage your vehicle's perfect finish.

XO2 with Vinyl Flattener can duplicate the look, feel, and hardness of polyurea bed liners. This is a great option for operations wanting versatility in a coating product.















# Scorpion Rubberized Undercoating

#### **Key Benefits:**

- > Rubber-Base Undercoat
- > Sound Deadener
- > Will not Dry-Out, Crack, or Peel
- > Paintable

# Scorpion Rubberized Undercoating is a paintable, rubber-based undercoat for undercarriages.

Customers need the right coating for the job. Scorpion Rubberized Undercoating is designed to protect undercarriages from the harsh abuse of day to day operations. Our paintable formula dries quickly and protects against rust. This product also does not contain asbestos or asphalt.

Another great quality of Scorpion Rubberized Undercoating is the sound deadening properties. Not only will this product protect undercarriages from damage but will also reduce road noise. Sold In:





#### **BENEFITS:**

- Heavy Duty
- Excellent Sound-Deadening Properties
- Will Not Dry-Out, Crack, or Peel
- Paintable
- Quick Dry Formula
- Protects Against Rust

#### Preparation:

Remove loose paint, rust, oil and grease prior to application. Then clean with a quality pre-paint cleaner.

#### Application:

Distance: 6"-9"

Flash Time: 5 minutes Coats: 2-3 medium wet

Paintable: 30 minutes @ 70°F







To get a quality application you need the right tool. Al's Liner offers two application tools to get the job done: Al's Liner Spray Gun and the Al's Liner Brush and Roller Kit.




### ◀ The Al's Liner Spray Gun:

With its special 5-point spray texture nozzle, this gun will maximize the durability of your Al's Liner Kit while allowing a customized texture and thickness to match any finish you like. With a simple air regulator, you can adjust the air pressure and achieve a variety of textures. The Al's Liner Spray Gun also has an adjustable trigger pull mechanism that allows you to set the maximum amount of trigger you can pull wherever you like it. It is easy to clean and disassemble for a simple and hassle-free job.

#### Features:

1.25 Gallon Hopper • 3 Orifice Configurations • 5-Point Texture Nozzle

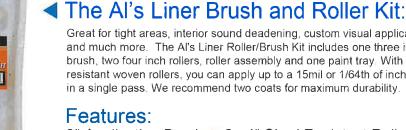

Great for tight areas, interior sound deadening, custom visual applications and much more. The Al's Liner Roller/Brush Kit includes one three inch brush, two four inch rollers, roller assembly and one paint tray. With the shed

resistant woven rollers, you can apply up to a 15mil or 1/64th of inch coating in a single pass. We recommend two coats for maximum durability

3" Application Brush • 2 - 4" Shed Resistant Rollers Roller Assembly Paint Tray



A well prepared surface is the key to achieving a long lasting and durable coating with your Al's Liner Truck Bed Lining.



To help you get a perfect preparation done easily every time, we developed the Al's Liner Cup Brush, a professional series abrasive nylon bristle cup brush. Its tough nylon bristles do a fantastic job sanding, scuffing, and blending surfaces.



The Al's Liner Cup Brush attaches to a pneumatic rotary tool and will speed up the sanding time on your next project while ensuring that your surface is properly prepared.

### **Key Benefits**

- > Easy To Use
- > For All Surfaces
- > Non-Sparking
- > Will Not Clog
- > Long Lasting
- > Speeds Up Prep



Al's HNR can be applied with a brush, roller or spray guns including the Al's Texture/Spray Gun, HVLP with 3mm spray nozzle and undercoating guns





### **Key Benefits**

- Blocks up to 35% of exterior heat/solar energy from transferring through substrate
- Only requires a 31 mil wet coat to achieve maximum heat reflection - covers up to 44 ft2 per gallon
- > Can be applied with spray guns, brushes and rollers
- Another green effort from Al's Made of 100% recycled latex polymers
- Cleanup is easy No solvents needed just need soap and water

Al's HNR, is proprietary blend of latex synthetic polymers. It contains acrylic, PVA and vinyl styrene and reinforced with ceramic micro spheres that provide incredible insulation, heat reflection and sound deadening properties.

HNR can withstand up to 500F and reflects exterior temperatures by 45°F or more. HNR can be applied to virtually any substrate with minimal prep, works just like latex paint. Excellent for interior automotive applications of all types! Al's HNR keeps your vehicle or boat cool in the summer and warm in the winter.

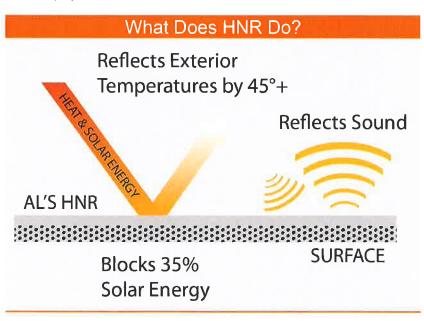



PWA ROOM# S416 OR CONTACT DANA MITCHELL (765) 720-9121 Al's Liner 6184 S US HWY 231 Cloverdale, IN 46120 800.999.6841 alsliner com



Shake & Shoot is a 2 part urethane protective coating that can be used in a variety of applications including: auto, commercial, and residential. It has excellent UV, abrasion, and chemical resistance properties. See data sheet for details.

Key Benefits

- Easy to install
- 1 Gallon kit
- Save Time and Money
- > Black, White, & Tintable
- Custom Colors
- Custom Textures

Al's Liner Shake & Shoot is a urethane truck bed liner coating designed to protect surfaces from rust and abuse. These kits are available in 3 colors (black, white, and tintable) and applied using an inexpensive undercoating gun.



\*A roller kit is also available.

ACTIVATOR BLACK BLACK

Pictured Part #: ALS-SNSK

#### TECHNICAL DATA

Color:

Black/White/Opaque

Mix Ratio:

3:1 (Tintable requires-3 oz. of color)

Dry Time (Air Dry):

4 - 6 hours

Dry Time (Force Dry);

30 minutes @ 120°F

Pot Life:

60 min. @ 72°F/22:2°C, 50% RH

Shelf Life (Unopened): 1

12 months

#### **GUN SETUP (UNDERCOATING GUN)**

Air Pressure:

60 - 80 psi

#### AVAILABLE PART NUMBERS

ALS-SNSB -ALS-SNSW -

Shake & Shoot Black 4 Qt - Refill (No Gun)

ALS-SNST

Shake & Shoot White 4 Qt - Refill (No Gun)Shake & Shoot Tintable 4 Qt - Refill (No Gun)

ALS-SNSK

Shake & Shoot Black 4 Qt - Kit With Gun

ALS-SNRB ALS-SNRW ALS-SNST Shake & Roll Black 1 Gal Kit with Roller & BrushShake & Roll White 1 Gal Kit with Roller & Brush

Shake & Roll Tintable 1 Gal Kit with Roller & Brush



Scorpion High Pressure Systems are 100% solids, contain zero VOC and are quick to dry and easy to use.

The Scorpion High Pressure Systems are fast setting polyurea spray systems for our unique aromatic and aliphatic polyurethane formulations. The systems are easy to use and has a tack-free time as short as 6 seconds. They are 100% solids and contain zero VOCs.

Scorpion supplies a complete lineup of high pressure polyurea systems including:

Scorpion Green - Soy Based Hybrid Polyurea Scorpion Aromatic - Extremely Tough Polyurea Scorpion Aliphatic - UV Stable Polyurea Scorpion Gel - Slow Tack Time for OEM Applications

The Scorpion High Pressure Systems are 100% Solids, contains Zero VOCs and tack-free times as short as 6 seconds.





Scorpion Applications include but not limited to:

- Truck Beds
- Wheel Wells
- Fender Flares
- Rocker Panels
- Tool Boxes
- Trailers
- Utility Beds
- Boats
- RV/ATV/UTV
- OEM Applications

















Scorpion Protective Coatings, Inc. 6184 S US HWY 23 Cloverdale, IN 46120 800 483 9087



## High Pressure Pump Package

Scorpion's High Pressure Coatings Systems are built around the best polyrea coatings and are applied using Graco® Reactor Series Plural-Component Proportioner Systems. This equipment is easy to use, rugged, reliable and easy to maintain.



#### Scorpion High Pressure Systems Include:

A-XP1 REACTOR PUMP SYSTEM
10' HEATED HOSE WHIP
50' HEATED HOSE
AP FUSION GUN
T1 FEED PUMP PACKAGE
HIGH VISCOSITY AGITATOR
DRUM WRENCH
SCORPION AROMATIC HP DRUM SET
WIRE TAPE (12 ROLLS)
CUP BRUSHES (4" & 6")
SETUP & TRAINING







## High Pressure Pump Package

Scorpion's High Pressure Coatings Systems are built around the best polyrea coatings and are applied using Graco® Reactor Series Plural-Component Proportioner Systems. This equipment is easy to use, rugged, reliable and easy to maintain.



#### Scorpion High Pressure Systems Include:

E-XP1 REACTOR PUMP SYSTEM
10' HEATED HOSE WHIP
50' HEATED HOSE
AP FUSION GUN
T1 FEED PUMP PACKAGE
HIGH VISCOSITY AGITATOR
DRUM WRENCH
SCORPION AROMATIC HP DRUM SET
WIRE TAPE (12 ROLLS)
CUP BRUSHES (4" & 6")
SETUP & TRAINING














**GET MORE. MAKE MORE. SPEND LESS** 

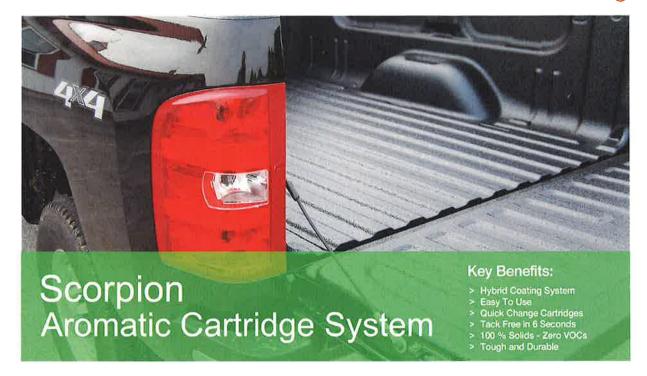

## The Scorpion Aromatic Cartridge System is quick drying, 100% solids and contains Zero VOCs. Performance and durability for truck bed liners.

The Scorpion Aromatic Cartridge System is a fast setting cartridge spray system. This system is an easy to use quick cartridge system and has a tackfree time of 6 seconds, are 100% solids and contain zero VOCs.

The Aromatic Series offers performance and durability of a polyurea at the price of a hybrid. Great for any applications requiring high tensile strength, cut and abrasion resistance and overall toughness.

The Scorpion Cartridge System is 100% Solids, contains Zero VOCs and is tackfree in 6 seconds.



Scorpion Applications include but not limited to:

- Truck Beds
- Wheel Wells
- Fender Flares
- Rocker Panels
- Tool Boxes
- Trailers
- Utility Beds
- Boats
- RV/ATV/UTV

















## Scorpion WB250 is a color stable, waterborne urethane used for coating and sealing a multitude of surfaces and/or existing coatings.

Scorpion Waterborne Urethane is designed to add a layer of protection that is both abrasion and chemically resistant. WB250 also displays high levels of UV stability, meaning it will hold it's color.

WB250 can be applied clear or can be tinted using standard household water-based paint. A perfect coating for the home including but not limited to decks, patios, docks, furniture, and concrete applications.

This coating is ideal for any area where a thin mil, Zero-VOC, abrasion resistant coating or sealer is required.

Low equipment and coating cost, along with unequaled performance, makes Scorpion's products some of the most desirable in the world.

#### Scorpion WB250 Product Advantages:

- Easy to Apply
- Zero VOC
- Low Odor
- Abrasion Resistance
- Chemical Resistance
- Applies to virtually any surface
- · Decks · Furniture
- · Docks · Concrete Applications
- · Patios · Virtually Any Surface



## DESCRIPTIONS

**Corporation Office** 

Scorpion Window Film 6184 S US HWY 231 Cloverdale, IN 46120

P: (800) 483.9087 F: (765) 653.7175

E: info@scorpionwindowfilm.com

W: www.scorpionwindowfilm.com



VLT RANGE: 5%, 15%, 20%, 35%, 40%, 50% WARRANTY: Lifetime Warranty The Predator Series features a 1.5 mil dual-ply, signal friendly construction. A non-reflective, color-stable film that offers great optical clarity. Predator provides both the installer and consumer a choice that will last a lifetime.

2 Ply – 1.5 mil Color-Stable Construction Signal Friendly 99% UV Rejection Excellent Optical Quality



VLT RANGE: 5%, 20%, 35%, 50%, 70% WARRANTY: Lifetime Warranty The Sting Series features a 1.5 mil dual-ply, signal friendly construction using the latest in deep dye technology. With its non-reflective (black) appearance, Sting provides both the installer and consumer a choice that will last a lifetime.

2 Ply – 1.5 mil Color-Stable Construction Signal Friendly 99% UV Rejection Excellent Optical Quality



VLT RANGE: 5%, 15%, 20%, 35%, 50%, 70% WARRANTY: Lifetime Warranty The Carbon Series features a 1.5 mil, dual-ply, signal friendly construction. Equipped with color-stable carbon deposit technology, the Carbon Series offers increased fade protection while increasing heat rejection when compared to dyed films.

2 Ply – 1.5 mil Advanced Carbon Deposit Technology Signal Friendly Increased Heat Rejection 99% UV Rejection Excellent Optical Quality



VLT RANGE: 5%, 15%, 20%, 35%, 40%, 50% WARRANTY: Lifetime Warranty The Venom Series features a 1.5 mil dual-ply, carbon-ceramic construction. Venom Carbon-Ceramic film is designed with you in mind. This ceramic window film offers high heat rejection with great IR rejection.

2 Ply – 1.5 mil Carbon-Ceramic Construction Signal Friendly Exceptional Heat Rejection 99% UV Rejection Excellent Optical Quality



VLT RANGE: 5%, 15%, 20%, 35%, 40%, 50%, 70% WARRANTY: Lifetime Warranty The Shield Series IR features a 1.5 mil dual-ply, nano-ceramic construction. Shield IR Nano-Ceramic film is designed with you in mind. Offering the ultimate in UV protection, this nano ceramic film achieves the highest heat rejection at any point on the Nanometer Solar Spectrum.

2 Ply – 1.5 mil Nano-Ceramic IR Construction Signal Friendly Exceptional Heat Rejection 99% UV Rejection Excellent Optical Quality



## PERFORMANCE DATA

Corporation Office Scorpion Window Film 6184 S US HWY 231

Cloverdale, IN 46120

P: (800) 483.9087 F: (765) 653,7175 E: info@scorpionwindowfilm.com W: www.scorpionwindowfilm.com

PREDATOR SERIES	VLT	TSER	VLR (f)	VLR (E)	UVR	
PSD05C	3	37	4	5	99	
PSD15C	13	35	5	6	99	
PSD20C	19	34	5	5	99	
PSD35C	32	30	5	6	99	
PSD40C	42	26	6	6	99	
PSD50C	47	24	6	6	99	

STING SERIES	VLT	TSER	VLR (1)	VLR (E)	UVR	
ST5B	4	39	4	4	99	
ST20B	19	36	5	5	99	
ST35B	37	30	5	5	99	
ST50B	57	25	6	6	99	
ST70B	69	22	7	7	99	

CARBON SERIES	VLT	TSER	VLR (1)	VLR (E)	UVR
CS05B	6	50	5	5	99
CS15B	11	49	5	5	99
CS20B	21	46	5	5	99
CS35B	31	41	5	5	99
CS50B	48	36	6	6	99
CS70B	78	27	8	8	99

VENOM SERIES	VLT	TSER	IRR	VLR (I)	VLR (E)	UVR	
VS05C	6	51	74	5	5	99	
VS15C	14	45	61	5	5	99	
VS20C	18	43	56	5	5	99	
VS35C	35	31	41	5	5	99	
VS40C	42	29	36	5	5	99	
VS50C	50	27	31	6	6	99	
IRR: VENOM IR REJECTION PERCE!	NTAGE @ 900-1000	NM					

SHIELD SERIES	VLT	TSER	IRR	VLR (1)	VLR (E)	UVR	
SH5IR	7	58	80	5	5	99	
SH15IR	16	54	74	5	5	99	
SH20IR	25	51	71	5	5	99	
SH35IR	36	46	63	5	5	99	
SH40IR	41	44	63	6	6	99	
SH50IR	52	41	61	6	6	99	
SH70IRXLT	72	44	93	9	9	99	
IRR: SHIELD IR REJECTION PERCENTA	AGE @ 780-2500	NM					



## PERFORMANCE DATA

#### **ABBREVIATIONS**

VLT = VISIBLE LIGHT TRANSMITTED
TSER = TOTAL SOLAR ENERGY REJECTED
ST = SOLAR ENERGY TRANSMITTED
SR = SOLAR ENERGY REFLECTED
SA = SOLAR ENERGY ABSORBED
VLR \* = VISIBLE LIGHT REFLECTED INTERIOR

VLR.\* = VISIBLE LIGHT REFLECTED EXTERIOR GR = GLARE REDUCTION SHGG = SOLAR HEAT GAIN COEFFICIENT SC = SHADING COEFFICIENT IRR = INFARED REJECTION UVR = UV REJECTION

MIRAGE SERIE	S								IRR: IR REJE	ECTION PERC	ENTAGE @ 78	80-2500 NM
PART NUMBER	VLT	TSER	ST	SR	SA	VLR®	VLR (E)	GR	SHGC	sc	IRR	UVR
APG20SV	19	78	14	53	34	56	56	79	0.23	0.26	93	99
APG35SV	30	68	22	42	36	42	43	67	0.32	0.37	88	99
PG50SV	44	56	34	29	37	27	28	51	0.44	0.50	80	99
VISION SERIES	3											
PART NUMBER	VLT	TSER	ST	SR	SA	VLR (i)	VLR (E)	GR	SHGC	SC	IRR	UVR
HPS20N	19	65	18	26	56	31	29	78	0.35	0.41	81	99
HPS30N	35	52	33	16	52	19	17	61	0.49	0.56	67	99
AHPS60N	58	34	54	8	37	10	9	36	0.66	0.76	45	99
FLARE SERIES												
PART NUMBER	VLT	TSER	ST	SR	SA	VLR (i)	VLR (E)	GR	SHGC	sc	IRR	UVR
AHPS20BR	23	72	15	39	46	33	28	75	0.28	0.32	92	99
AHPS35BR	35	62	26	29	45	24	19	61	0.38	0.44	86	99
SPIRIT SERIES												
PART NUMBER	VLT	TSER	ST	SR	SA	VLR (I)	VLR (E)	GR	SHGC	SC	IRR	UVR
ADR5N	8	80	10	53	37	15	56	91	0.20	0.23	93	99
DR15N	14	75	15	47	39	21	48	84	0.25	0.29	90	99
DR25N	27	60	28	29	44	14	27	70	0.40	0.47	79	99
DR35N	38	45	42	14	44	8	13	58	0.55	0.63	62	99
DR45N	45	36	51	9	40	7	8	49	0.64	0.73	48	99
ELEMENT SER	IES											
PART NUMBER	VLT	TSER	ST	SR	SA	VLR (i)	VLR (E)	GR	SHGC	sc	IRR	UVR
EL30IR	32	71	19	42	39	48	46	64	0.29	0.33	92	99
EL50IR	50	61	31	35	34	37	35	43	0.38	0.44	83	99
EL70IR	69	45	50	31	19	21	22	24	0.55	0.63	74	99
PRIVACY SERI	VLT         TSER         ST         SR           19         78         14         53           30         68         22         42           44         56         34         29           ES           VLT TSER         ST         SR           19         65         18         26           35         52         33         16           58         34         54         8           SS           VLT TSER         ST         SR           23         72         15         39           35         62         26         29           ES           VLT TSER         ST         SR           8         80         10         53           14         75         15         47           27         60         28         29           38         45         42         14           45         36         51         9           PRIES           VLT TSER         ST         SR           32         71         19				APDO	BOUT = BLAC	K OUT APDOW	OUT = WHITE	OUT APD70	W = FROST		
PART NUMBER	VLT	TSER	ST	SR	SA	VLR®	VLR (E)	GR	SHGC	SC	IRR	UVR
APD0BOUT	0	70	0	5	96	7	5	100	0.30	0.30	99	99
APD0WOUT	15	70	20	46	34	78	61	84	0.30	0.35	73	99
APD70W	68	29	66	16	18	20	19	24	0.71	0.82	33	99
SAFETY & SEC	URITY	SERIES						AGRCL# =	ANTI-GRAFFITI	ASFPS# = SA	AFETY SECUR	ITY CLEAR
PART NUMBER	VLT	TSER	ST	SR	SA	VLR(I)	VLR (E)	GR	SHGC	SC	IRR	UVR
AGRCL4	90	15	84	9	7	9	9	0	0.85	0.99	18	99
GRCL6	87	17	81	10	10	10	10	3	0.83	0.96	23	99
ASFPS4	89	15	82	8	9	9	9	1	0.85	0.98	31	99
ASFPS7	89	15	81	8	11	9	9	1	0.85	0.97	24	99
ASFPS8	87	17	79	8	13	9	10	3	0.83	0.95	28	99
ASFPS12	87	20	75	В	18	9	9	4	0.80	0.92	28	99

All tested materials were applied on a 3mm clear glass surface in accordance with industry standard tests. The intended purpose of the data it provides is for comparison purposes only.





FILM TO GLASS COMPATIBILITY CHART

		Mirage Vision					Flare Spirit						Element			Black White Frost Anti-				Safety Clear						
	VAIT / NAM									_			05	4E				Out	Out		Gra					
	VLT/MIL	20	35	50	20	30	60	20	35	5	15	25	35	45	30	50	70	0	15	68	4	6	4	7	8	12
	Clear Annealed 1/8" - 1/4" Mono 1 - 100 ft <sup>2</sup>	1	~	<b>*</b>	1	1	1	<b>*</b>	<b>*</b>	1	1	1	1	*	1	1	1	0	0	1	<b>*</b>	>	1	*	1	1
Single Pane -	H/S Tempered 1/8" - 3/8" Mono 1 - 100 ft <sup>2</sup>	1	<b>*</b>	<b>✓</b>	1	*	1	1	1	1	1	1	1	1	1	1	1	*	1	1	1	1	1	1	1	1
- Single	Tinted Annealed 1/8" - 1/4" Mono 1 - 40 ft²	7	-	1	1	1	1	1	1	1	1	1	1	1	*	1	1	0	0	1	1	1	1	1	1	1
	Tinted Annealed 1/8" - 1/4" Mono 40 - 100 ft <sup>2</sup>	7	P	1	1	1	1	1	1		1	1	1	1	P	1	1	0	0	1	1	1	1	1	1	1
	Clear Annealed 1/8" - 1/4" IG 1 - 30 ft <sup>2</sup>	1	1	1	1	<b>*</b>	1	*	1	1	1	1	1	1	1	1	1	0	0	1	1	1	1	1	1	~
	Clear Annealed 1/8" - 1/4" IG 30 - 40 ft²	1	1	1	7		1	7	1	1	1	1	1	1	*	1	1	0	0	1	1	1	1	1	1	*
ane	Outboard Tinted 1/8" - 1/4" IG 1 - 30 ft <sup>2</sup>	TO SERVICE SER	***	1	7	1	1	7	1	7	*	***	THE STATE OF THE S	1		1	1	0	0	1	1	1	1	1	1	1
- Dual Pane	Outboard Tinled 1/8" - 1/4" IG 30 - 40 ft°	7	100	1	10)	够	1	THE STREET	1	100	•	W.		1	0	<b>*</b>	1	0	0	1	1	1	1	1	1	1
	Inboard Tinled 1/8" - 1/4" IG 1 - 30 ft°	P	· ·	1	7		1	m	1	7	0	0	0	1	-	1	1	0	0	1	1	1	1	1	1	1
	Inboard Tinted 1/8" - 1/4" IG 30 - 40 ft²	0	,	1	0	R	1	,	*	P	0	0	0	1	0	1	1	0	0	1	1	1	1	1	1	•
Ħ	Standard 1/8" - 1/4" IG 1 - 30 ft²	7		1	-	<b>W</b>	1	100 mg/m	1	1	0	0	0	1	-	7	1	0	0	1	1	1	1	1	1	~
	Standard 1/8" - 1/4" IG 30 - 40 ft²	Ą	*	1	0	n	1	Top I	1		0	0	0	1		P	1	0	0	1	1	1	1	1	1	*
	Plus or E2 1/8" - 1/4" IG 1 - 30 ft <sup>2</sup>	鹤	7	*	<b>STA</b>	100	1	构	A STATE OF THE STA	<b>**</b>	0	0	0	1	***	7	1	0	0	1	1	1	1	1	1	~
Low E	Plus or E2 1/8" - 1/4" IG 30 - 40 ft <sup>2</sup>	0	m	1	0	Ą	1	7	-	7	0	0	0	1	-	7	1	0	0	1	1	1	1	1	1	1
	Plus Plus or E3 1/8" - 1/4"  G 1 - 30 ft <sup>2</sup>	<b>,</b>	100	<b>*</b>	0		1	THE STATE OF THE S	-	7	0	0	0	1	-	7	1	0	0	1	1	1	1	1	1	1
	Plus Plus or E3 1/8" - 1/4" IG 30 - 40 ft²	0	W.	1	0	***	1	,	7	Ţ	0	0	0	1	P	7	1	0	0	1	1	1	1	1	1	1
	Clear/Clear/Clear 1/8" - 1/4" IG 1 - 30 ft <sup>2</sup>	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	0	0	1	1	1	1	1	1	1
ane	Clear/Clear/Low E 1/8" - 1/4" IG 30 - 40 ft <sup>e</sup>	0	0	0	0	0	0	0	0	0	0	0	0	0		7	1	0	0	<b>*</b>	1	1	1	1	1	*
Triple Pane	Tinted/Clear/Clear 1/8" - 1/4" IG 1 - 30 ft <sup>2</sup>	0	0	0	0	0	0	0	0	0	0	0	0	0	<b>✓</b>	1	1	0	0	1	1	1	<b>✓</b>	1	<b>✓</b>	1
	Tinted/Clear/Low E 1/8" - 1/4" IG 30 - 40 ftº	0	0	0	0	0	0	0	0	0	0	0	0	0	7	7	1	0	0	1	1	1	<b>✓</b>	1	1	1
	Laminated Clear or Tinted All Sizes	0	0	0	0	0	0	0	0	0	0	0	0	0	7	7	·	0	0	1	1	1	1	1	1	1



## Paint Protection Film Product Specifications





There are a million causes of paint damage from stones and gravel to road debris. Resist the impact from these every day road hazards with BODYFENCE.




Should your paint become scratched, the BODYFENCE protective film will regenerate with the help of heat from the sun or hot water.

Scratches appear on the car body when using automatic mechanical car wash brushes, when rubbing against bushes on road sides, during everyday use or due to an act of vandalism.

All these scratches will disappear from the surface of the protective BODYFENCE film thanks to the heat of the sun or just rinsing with hot water. Your original paint is preserved.



The BODYFENCE protective film is a highly transparent film developed to protect the vehicle without altering its appearance. This film is available in both gloss and matt finish. Matt version will make any paint or gloss film matt.



The BODYFENCE protective film contains an anti-adhesion component. Thus, dust and dirt will adhere much less to the car body. Cleaning will be less frequent and significantly easier.

**GET MORE. MAKE MORE. SPEND**